




| STATE | PROJECT NUMBER | SHEET NO. | TOTAL SHEETS |
|-------|-------------------|-----------|--------------|
| GA. | STP-M001-00(9721) | 3 | 23 |

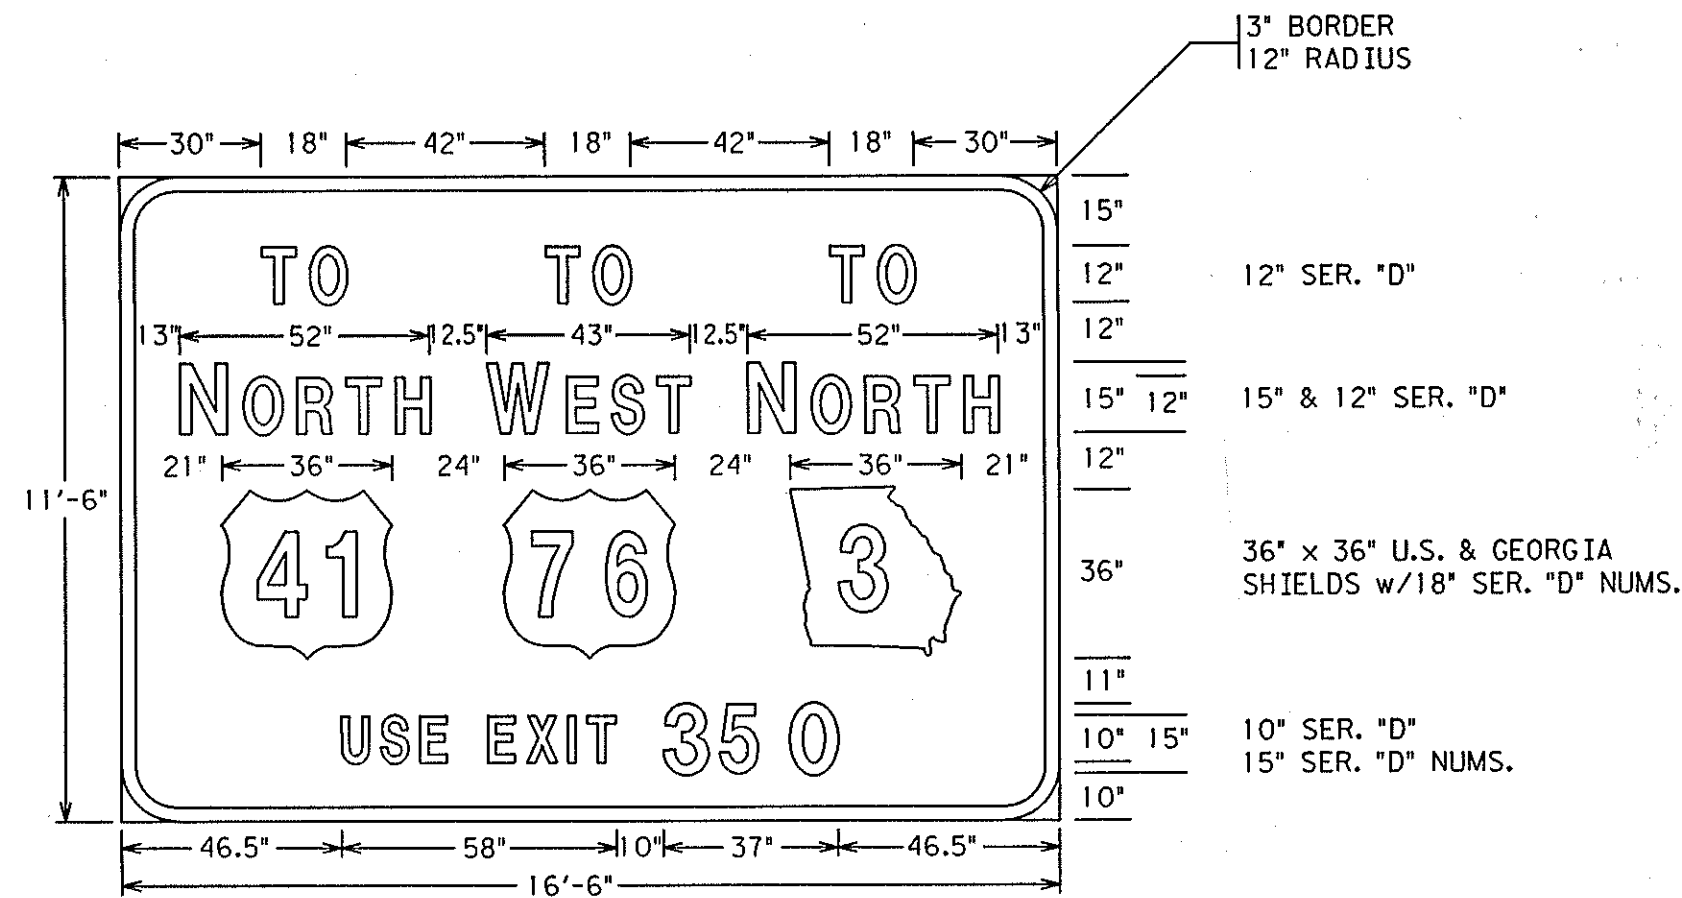


DETOUR #1
1 EACH REQ'D.

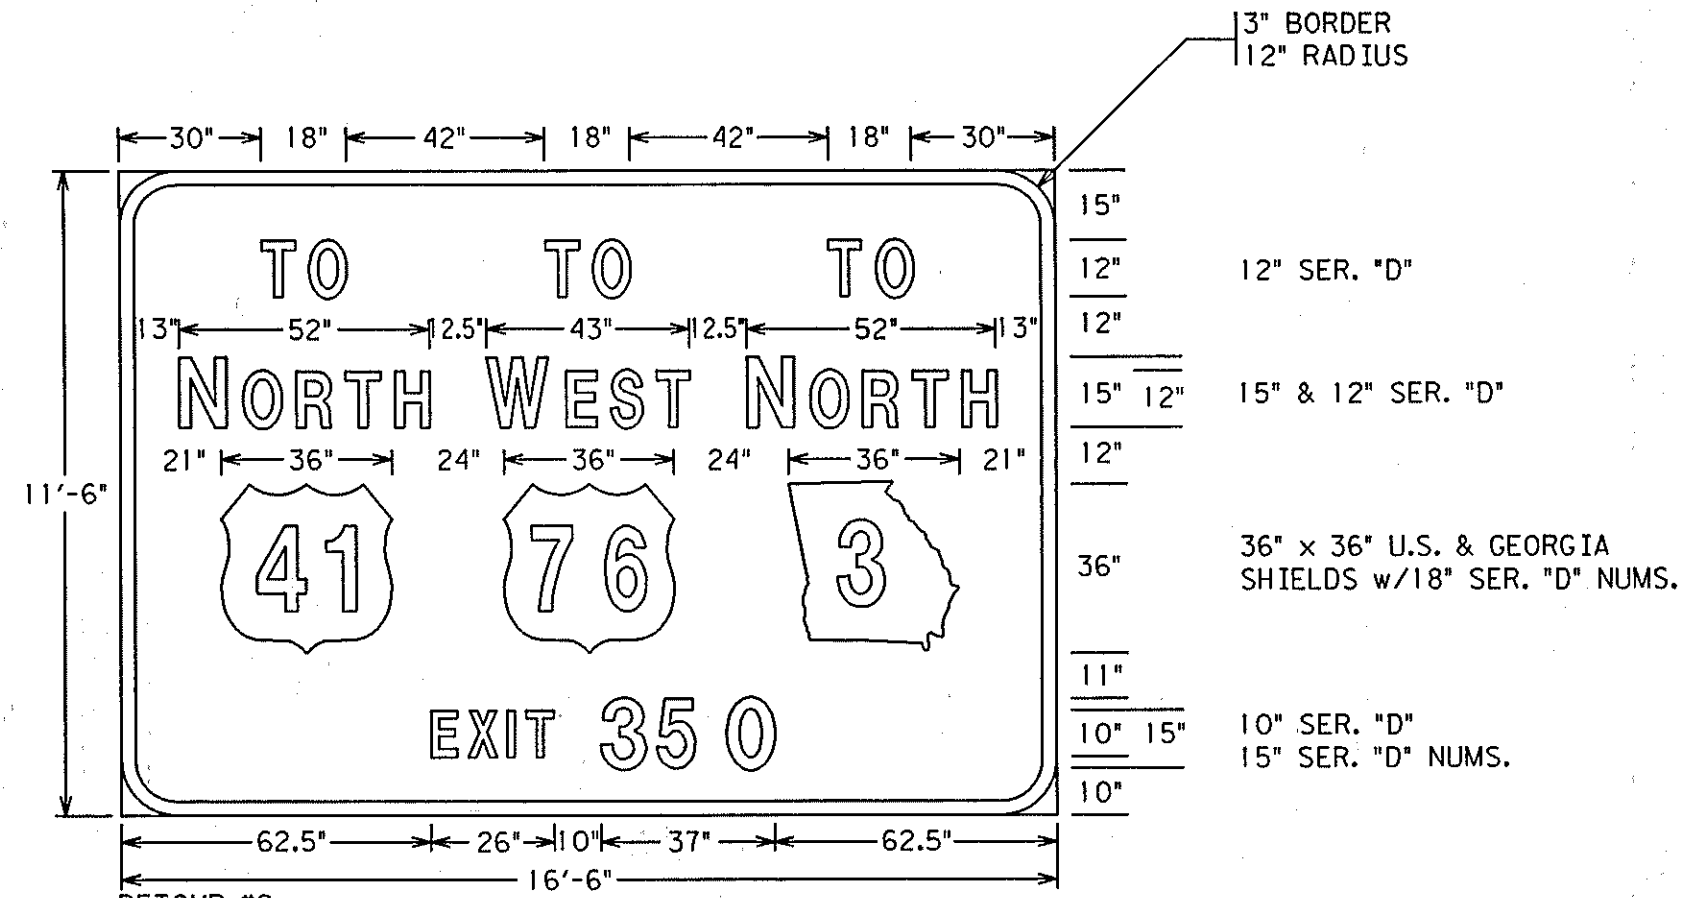

DETOUR #2
1 EACH REQ'D.

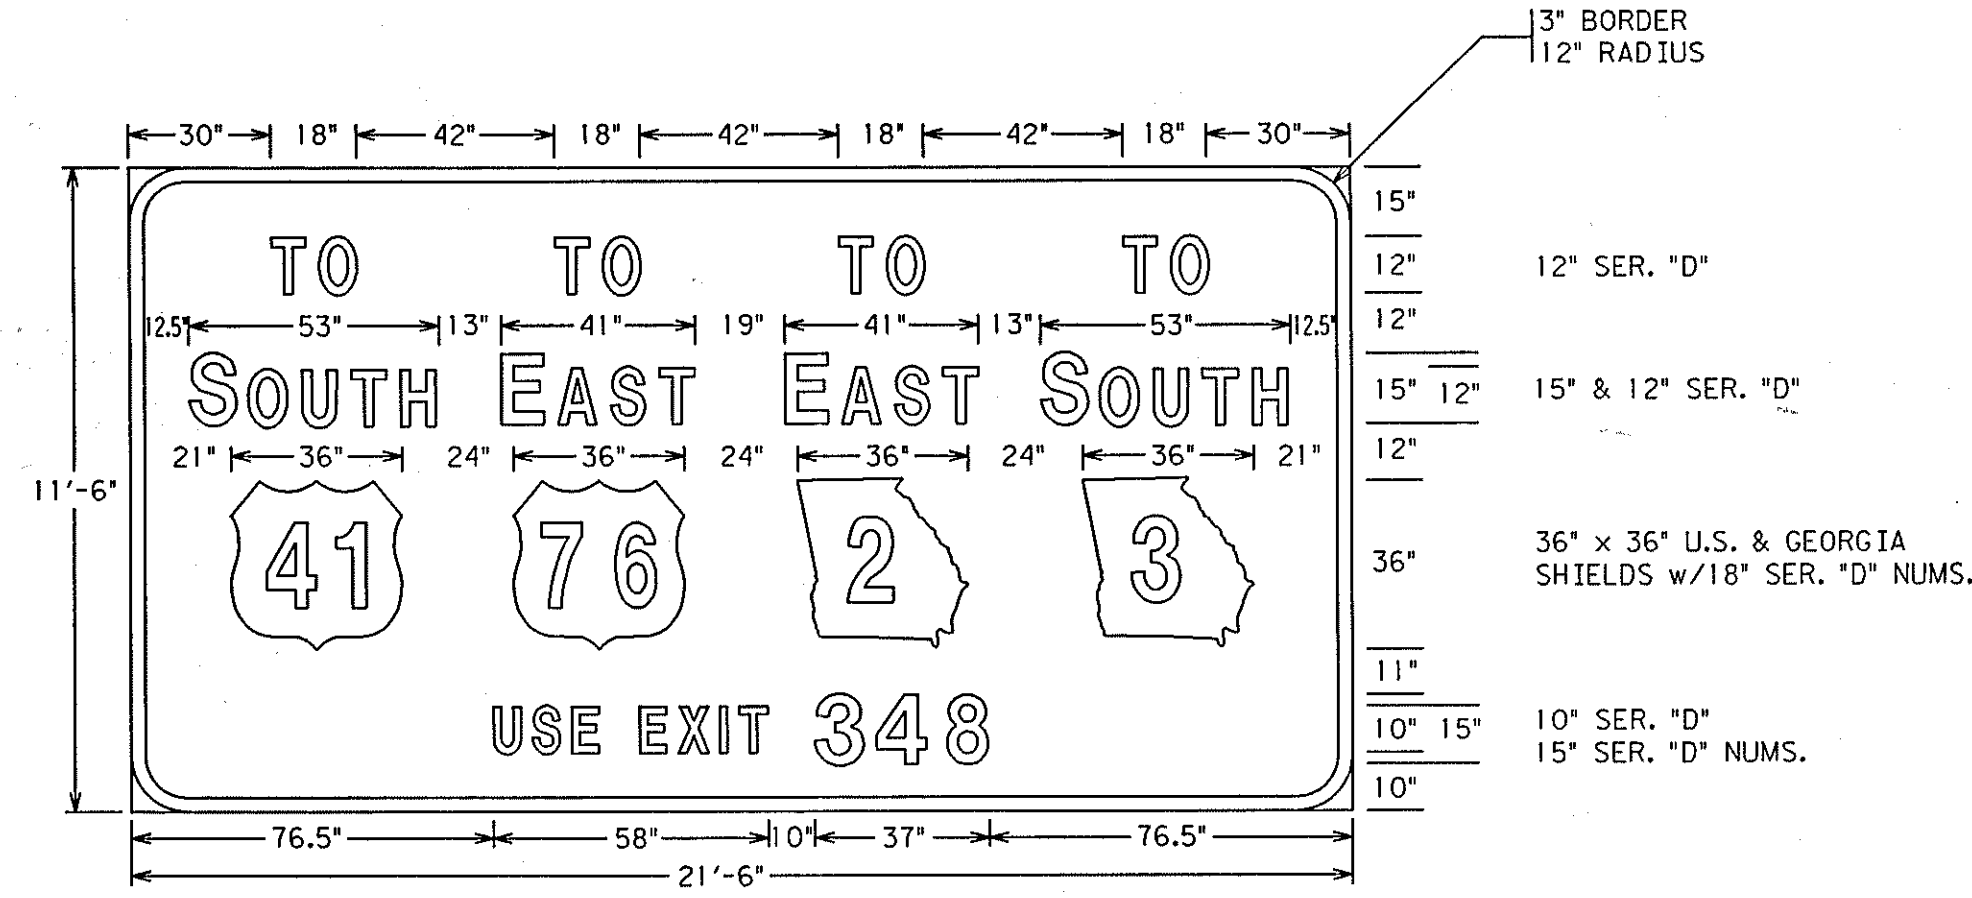

DETOUR #3
1 EACH REQ'D.

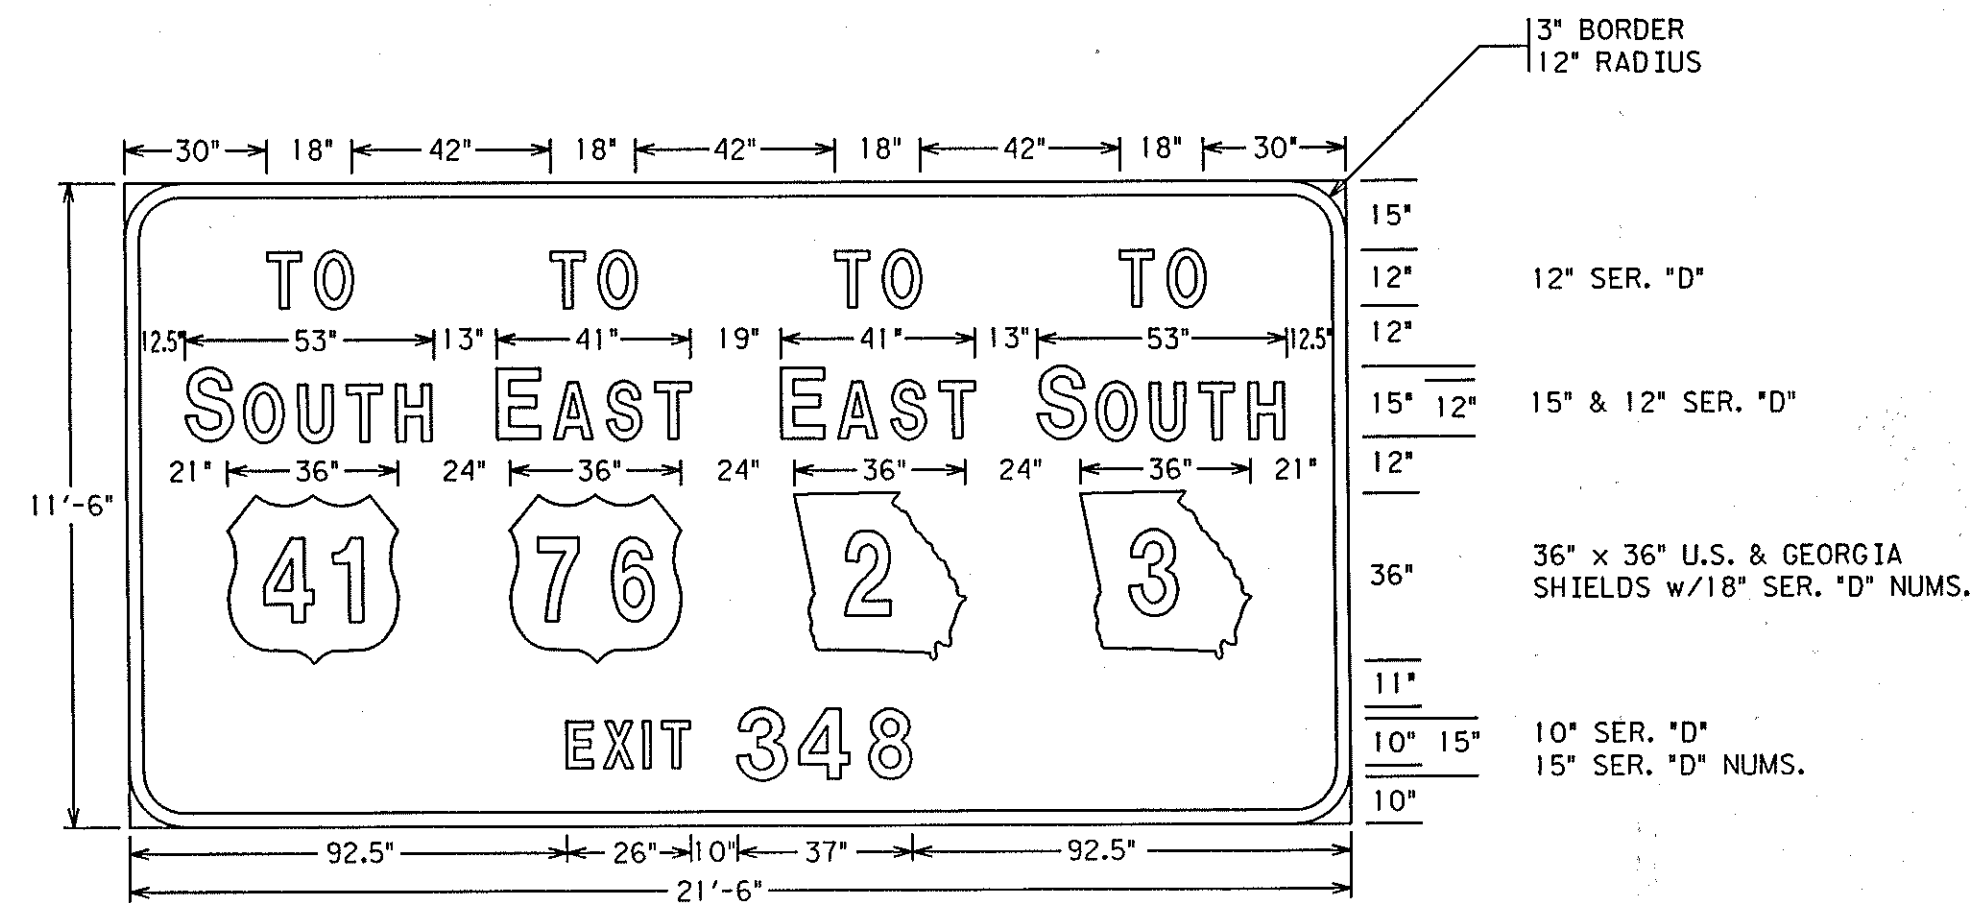

DETOUR #4
1 EACH REQ'D.

GENERAL NOTES

- SPECIAL ROADSIDE SIGNS SHALL CONFORM TO THE REQUIREMENTS SET FORTH IN THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION, AND ALL SUPPLEMENTS THERETO, AS WELL AS TO THE GEORGIA STANDARD SPECIFICATIONS AND/OR SPECIAL PROVISIONS.
- SPECIAL ROADSIDE SIGNS SHALL BE FABRICATED USING ALUMINUM BOLTED EXTRUDED PANELS.
- BACKGROUND FOR SPECIAL ROADSIDE SIGNS SHALL BE STANDARD INTERSTATE FLUORESCENT ORANGE, TYPE V (WIDE ANGLE PRISMATIC LENS), REFLECTIVE SHEETING, UNLESS SPECIFIED OTHERWISE IN THE PLANS.
- LEGENDS FOR SPECIAL ROADSIDE SIGNS SHALL BE BLACK, LETTERS, NUMERALS, SYMBOLS, AND BORDERS.
- SHIELDS SHALL BE 0.08 INCH ALUMINUM OF THE SIZE AND SHAPE SPECIFIED IN THE PLANS. U.S. AND GEORGIA SHIELD LEGENDS SHALL BE BLACK NUMERALS AND LETTERS SILK SCREENED ON WHITE, TYPE VI (PRISMATIC LENS), REFLECTIVE SHEETING BACKGROUNDS WITH NO BORDERS.
- FOR DETAILS OF U.S. SHIELDS AND ARROWS, REFER TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, CURRENT EDITION.
- LEGENDS FOR SPECIAL ROADSIDE SIGNS SHALL BE FASTENED TO SIGN PANELS WITH ALUMINUM PULL-THROUGH BLIND RIVETS OR WITH AN APPROVED NON-CORROSIVE FASTENER.
- SPACING BETWEEN LETTERS OR OTHER CHARACTERS THAT IS NOT SHOWN IN THE PLANS MAY BE RECOMMENDED BY THE MANUFACTURER, BUT SHALL CONFORM TO INTERSTATE SIGNING REQUIREMENTS.
- FOR ASSEMBLY DETAILS AND ASSEMBLY COMPONENTS DETAILS ON ALUMINUM BOLTED EXTRUDED PANELS, REFER TO GEORGIA STANDARDS 9041 AND 9042.
- WOOD SIGN POSTS TO BE USED FOR SIGNS IDENTIFIED AS DETOUR #1, #2, #3 AND #4, IN ACCORDANCE WITH SECTION 636 OF THE GEORGIA STANDARD SPECIFICATIONS AND/OR SPECIAL PROVISIONS.

| | | | |
|------------------|--|---|----------|
| PBS | | Post, Buckley, Schuh & Jernigan, Inc. CONSULTING ENGINEERS and PLANNERS | |
| DATE 12/13/02 | | GEORGIA DEPARTMENT OF TRANSPORTATION PRECONSTRUCTION DIVISION-OFFICE OF BRIDGE DESIGN | |
| REVISED #10 | | DETOUR SIGN DETAILS S.R.2/U.S. 41 OVER SOUTH CHICKAMAUGA CREEK | |
| ADDED GEN. NOTE | | CATOOSA CO. STP-M0001-00(972) NOVEMBER 2002 | |
| SCALE: NONE | | | |
| DESIGNED KBH | | CHECKED | REVIEWED |
| DRAWN | | LIAISON ENGINEER | APPROVED |

DETOUR SIGN DETAILS
SHEET 1 OF 1